



# High Performance Cooled CCD Camera System ALTA U3041F

The Alta U3041F uses a very large format 4-megapixel front-illuminated sensor, ideal for applications requiring large field of view, such as sky surveys and radiology.

Imaging Area of  
CCD

- 2048 x 2048 array, 15 x 15 micron pixels
- 16-bit digitization at 700 kHz; 12 bits at 2 MHz
- 32 Mbyte camera memory
- USB 2.0 interface: no plug in cards or external controllers
- Programmable, intelligent cooling to 45°C below ambient (D07 housing) / 60-65°C below ambient (D09 housing)
- Binning up to 8 Horizontal x 2048 Vertical
- Subarray readout and fast sequencing modes
- Programmable fan speed for low / zero vibration
- Two serial port outputs for control of peripheral devices
- General purpose programmable I/O port
- External triggering and strobe controls
- ActiveX drivers included with every system
- Field upgradeable firmware
- Fused silica windows
- Runs from single 12V supply with input voltage monitor
- Compact enclosure
- Programmable status indicators


- Astronomy
- Radiology
- Non-destructive testing



## CCD SPECIFICATIONS

CCD	Fairchild 3041
Array Size (pixels)	2048 x 2048
Pixel Size	15 x 15 microns
Imaging Area	30.7 x 30.7 mm (944 mm <sup>2</sup> )
Imaging Diagonal	43.4 mm
Video Imager Size	2.7"
Linear Full Well (typical)	100K electrons
Dynamic Range	82 dB
QE at 400 nm	3%
Peak QE (800 nm)	43.5%

For complete CCD specifications, including cosmetic grading, see data sheet from manufacturer.

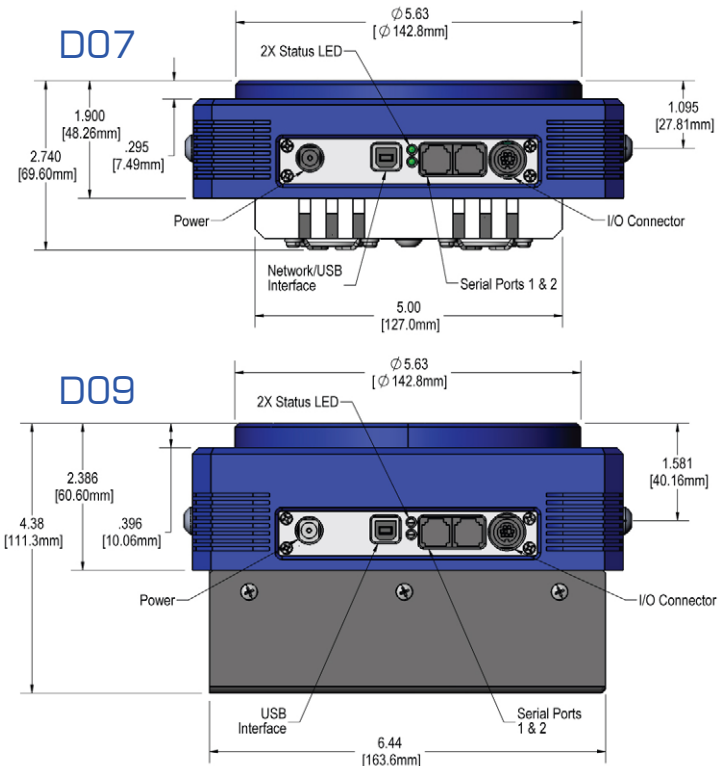

151 N. Sunrise Ste 902  
Roseville CA 95661 USA  
tel 916 218 7450  
fax 916 218 7451  
www.ccd.com




# ALTA U3041F

## Camera System Performance

PC Interface	USB 2.0
Max. Cable Length	5 meters between hubs; 5 hubs maximum (max. total of 30m)
Digital Resolution	16 bits at 700 kHz; 12 bits at 2 MHz.
System Noise (typical)	10 e <sup>-</sup> RMS
Pixel Binning	1x1 to 8 x 2048 on-chip
Exposure Time	30 milliseconds to 183 minutes (2.56 microsecond increments)
Image Sequencing	1 to 65535 image sequences under software control
Frame Sizes	Full frame, subframe, focus mode
Cooling (typical)	Thermoelectric cooler with forced air. Maximum cooling 45°C below ambient temperature (60-65°C below ambient with High Cooling D09 housing)
Dark Current (typical)	<1 e <sup>-</sup> /pixel/sec (-25°C). <0.15 eps for High Cooling D09 housing.
Temperature Stability	± 0.1°C
Camera Head	D07. Aluminum, hard blue anodized. 7" x 7" x 2.55" (17.8 x 17.8 x 6.48 cm) Optional High Cooling housing: D09. 7" x 7" x 3.25" (17.8 x 17.8 x 8.9 cm) Weight: 4.2 lb. (1.9 kg)
Mounting	5.125" bolt circle. Optional Nikon F-mount or Canon FD mount.
Back Focal Distance	1.025" (2.60cm). Optional low profile housing D11 (no shutter): 0.61" ( 1.56 cm) Optional D09: 1.40" (3.56 cm) [optical]
Operating Environment	-22° to 27°C. Relative humidity: 10 to 90% non-condensing.
Cable Length	Standard: 15 ft (4.5m)
Power	40W maximum power with shutter open and cooling maximum. AC/DC "brick" supply with int'l AC input plug (100-240V, 50-60 Hz). Alternate 12V input from user's source.
Shutter	Melles Griot 63mm (D07 and D09). D11 Low profile: no shutter.
Remote Triggering	LVTTL input allows exposure to start within 25 microseconds of rising edge of trigger

### CCD SENSITIVITY

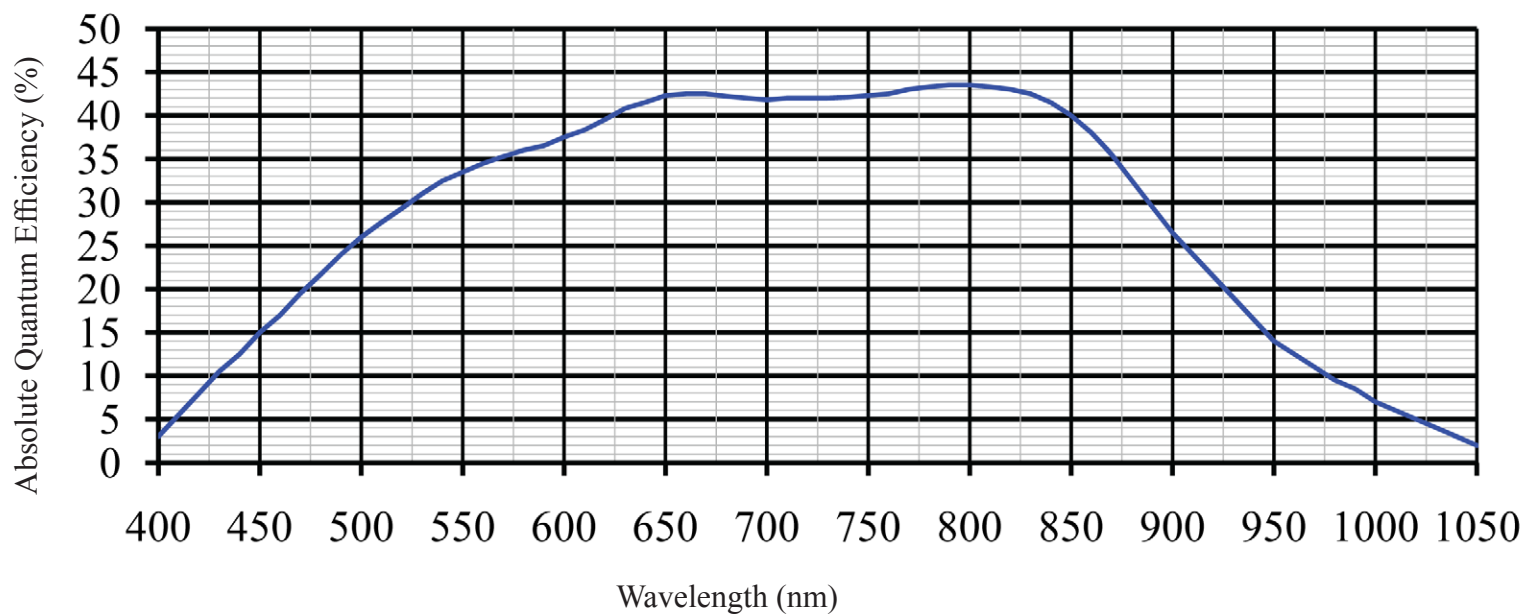

151 N. Sunrise Ste 902  
 Roseville CA 95661 USA  
 tel 916 218 7450  
 fax 916 218 7451  
[www.ccd.com](http://www.ccd.com)